


# LANSAN INTL LIMITED

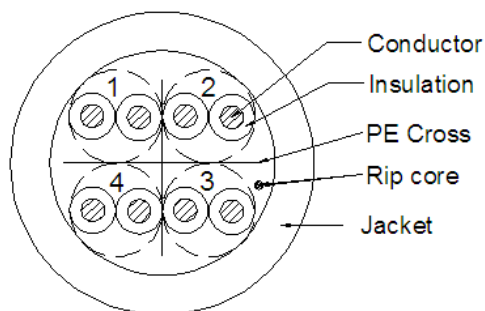

## Color cord

1. Blue-White/Blue
2. Orange-White/Orange
3. Green-White/Green
4. Brown-White/Brown

ITEM		UTP CAT6	
No. of Cord. (芯線數)		4 Pairs 對	
Conductor 導體	Material (材質)	CCAM	
	Construction (結構)	23AWG; 1 / 0.565± 0.008 mm	
Insulation 絕緣	Material (材質)	HDPE	
	Thickness (厚度)	0.180±0.02 mm	
	Diameter (外徑)	0.92± 0.02 mm	
Inner Layer 內絞合	Direction (絞向)	S (右向)	
	Pitch (絞距) REF	30mm underneath	
Cross 十字骨架		Material (材質)	Polyethy lene
	Construction (結構)	4.4mm*4.4mm	
被覆	Material (材質)	PVC	
	Diameter (外徑)	5.8±0.20 mm	
	Thickness (厚度)	0.55±0.20 mm	
Marking	Optional		
<b>ELECTRICAL PROPERTIES(電氣特性)</b>			
ITEM			
Insulation Resistance (絕緣電阻)		Min. 5000 mega ohms-km at 20°C	
Dielectric Test (耐電壓)		1000V DC /1 min ; No Breakdown	
Temperature Rating (額定溫度)		60°C	
Voltage Rating (額定電壓)		30V	
DRWN.	lua	SPEC NO:	<b>Construction: 1/0.565CCA×4P+ 骨架+CORSS 5.8mm PVC</b>
CHKD.			
APPD.		DATE:2019.7.17	
			<b>LANSAN</b>