


LANSAN INTL LIMITED

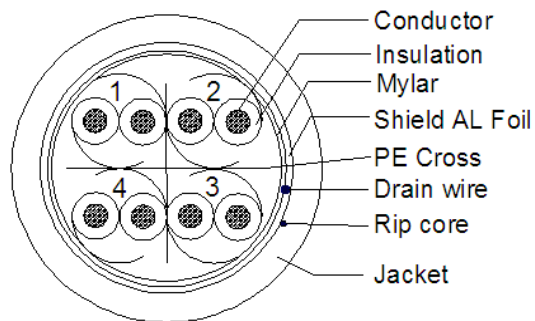

Color cord

- 1.Blue-White/Blue
- 2.Orange-White/Orange
- 3.Green-White/Green
- 4.Brown-White/Brown

ITEM		F/UTP CAT6 23AWG
No. of Cord. (芯線數)		4 Pair 對
Conductor 導體	Material (材質)	CCA
	Construction (結構)	23AWG; 0.565± 0.008 mm
Insulation 絕緣	Material (材質)	HDPE
	Normal Thickness (厚度)	0.192 mm
	Diameter (外徑)	0.95 ± 0.05 mm
Inner Layer 內絞合	Direction (绞向)	S(右向)
	Pitch (绞距) REF	30mm underneath
Cross 十字骨架	Material (材質)	Polyethylene
	Construction (結構)	4.8mm×4.8mm
Shiel ding 1	Material (材質)	Mylar Spirally Wrapped
隔離	Construction (結構)	100% coverage with 25% overlapping
Drain wire 地线	Material (材質)	CCA
	Construction (結構)	1/0.40±0.008 mm
Shiel ding 2	Material (材質)	Aluminum Mylar Spirally Wrapped
隔離	Coverage (遮蔽率)	100% coverage with 25% overlapping
Rip cord撕裂绳	Material (材質)	Nylon
Jacket 被覆	Material (材質)	PVC
	Thickness	0.55 mm(Min. Thichness: 0.50mm)
	Diameter (外徑)	5.8± 0.20 mm
	Color (颜色)	Optional
Marking	Optional	
ELECTRICAL PROPERTIES(電氣特性)		
ITEM		
Insulation Resistance (絕緣電阻)		Min. 5000 mega ohms-km at 20℃
Dielectric Test (耐電壓)		1000V DC /1 min ; No Breakdown
Temperature Rating (额定温度)		60℃
Voltage Rating (额定电压)		30V
TEST		
DRWN.	LuO	SPEC NO:
CHKD.	YANG	20190710-001
APPD.		DATE:2019.07.17
		Construction: 1/0.565CCA×4P+PE CORSS+M+D+AM+Rip cord+5.8PVC
		 SHENZHEN LIANXUN INDUSTRIES CO., LTD www.lansancable.netTEL: 0755-84292700 FAX: 0755-84292331