


CAT6 F/UTP 23AWG 250Mhz
BC Bare copper Solid

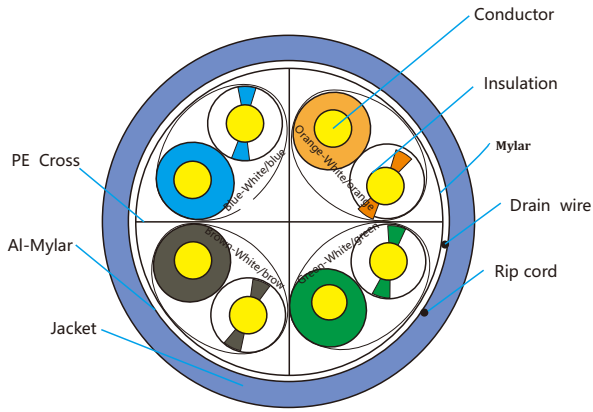

Blue-White/Blue

Orange-White/Orange

Green-White/Green

Brown-White/Brow

ProductDetails

Conductor

Material: BarecopperSolid

Construction: 23AWG;1/0.585±0.008mm

Insulation

Material: HDPE

NormalThickness: 0.28mm

Diameter: $1.15 \pm 0.05 \text{ mm}$

InnerLayer

Direction: S

PitchREF: 30mmunderneath

OutsideLayer

Direction: S

PitchREF: 100±20mm

Cross

Material: HDPE

Construction: 5,5mm×5,5mm

Shielding1

Material: MylarSpirallyWrapped

Coverage: 100%coveragewith25%overlapping

Drainwire

Material: Aluminum Magnesium metal

Construction: 1/0.40±0.008 mm

Shielding2

Material: AluminumMylarSpirallyWrapped

Coverage: 100%coveragewith25%overlapping

Jacket

Material: PVC

Diameter: $7,2 \pm 0.20 \text{ mm}$

Thickness:0.60m(Min. Thickness:0.55mm)


WT GY BK RD YL GN BL

Marking

Category 6 F/UTP 23AWG/4PRS PVC

☐ **VERIFIED** ☐ **TO** ☐ **EIA/TIA** ☐ **568C. 2** ☐ **&** ☐

ISO/IEC 11801 XXXX METER

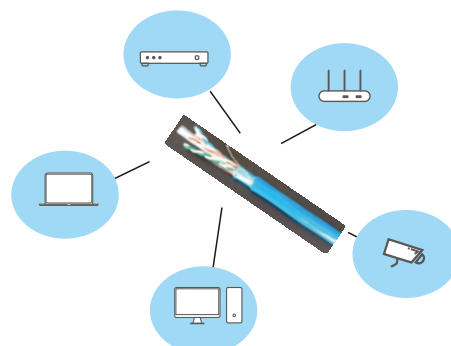

Product Characteristics

ELECTRICAL PROPERTIES

- **Insulation Resistance:** Min. 5000 mega ohms-km at 20C
- **Dielectric Test:** 1000V DC /1 min ; No Breakdown
- **Temperature Rating:** 60°C
- **Voltage Rating:** 30V
- **Operating Temperature Range:** -40~80°C

Certification standard

- independently tested and verified by ETL
- Guaranteed to meet TIA 568C.2 and ISO/IEC 11801 Specifications
- Center Cross Design
- Big Pulling Hole Design
- TIA 568C.2
- ISO 11801 CLASS E
- ETL approved
- UL listed

Packing



Lansan International Limited

Tel: (86)755-84292700 /84292800

Address: B3 Building, 99 Tong Xin Industrial Park, Tong Xin Road,
Tongle County, Longgang District, Shenzhen, Guangdong,
China, 518116

Website: <http://www.lansan-cabling.com/>
<http://lansuncable.en.alibaba.com/>

